

# New! MistBuster® 500

HIGH EFFICIENCY MIST & SMOKE COLLECTOR

Ideal for petroleum, synthetic and water soluble machining fluids.




MistBuster® Machine  
Mounted To Swiss Lathe



## New Patent Pending Technology Offers:

- **Clean Air** – Eliminates the haze associated with most metal working operations.
- **Reduced Mist Exposure** – Captures and cleans mist and smoke at the source.
- **Safety** – Reduces the risk of accidents caused by slippery surfaces.
- **Machine Fluid Savings** – The MistBuster® collects and returns the machine fluid to your machine rather than venting it to the atmosphere.
- **Cleaning Cost Savings** – Uncontrolled machine fluid mist will soil machinery, floors and ceilings.
- **High Efficiency Mist and Smoke Removal** – Independent laboratory tests confirm up to 97% efficiency.
- **Low Operating Costs** – The MistBuster® requires less than 230 watts of power to operate.
- **Low Maintenance Costs** – The MistBuster® 500 has no media filters to replace, ever!
- **Easy Installation** – The MistBuster® can be mounted directly to the machine tool, pedestal, wall or ceiling.
- **Superior Design** – Eliminates maintenance and rebuilding costs associated with out-of-balance centrifugal drums. (MistBuster® has one moving part.)

*The new MistBuster® 500 is a self-contained mist removal system designed to capture mist and smoke from metal working applications in industry. The MistBuster® can be direct mounted to machine tools or ducted using optional plenum and flex hose. The MistBuster® is the superior alternative to conventional centrifugal and media-type systems.*



**AIR QUALITY  
ENGINEERING**

Manufacturer and Worldwide Distributor of Air Cleaning Systems for Over 25 Years

# MistBuster® FEATURES & SPECIFICATIONS

## Principles of Operation:

Polluted air is drawn through the first stage mechanical mist impingers. These impingers are designed to remove the larger mist droplets and particles. The remaining sub-micron mist droplets and particles are removed in the second stage through the process of electrostatic precipitation (ESP). The ESP provides an intense electrical charge on the remaining contaminants through the ionizing field. The collection cell, which works much like a magnet, attracts and removes the charged mist droplets from the air stream. To optimize efficiency, an aluminum post-filter entraps particles, which may have been agglomerated on the cell plates. Clean air is then returned to the room.

## ADDITIONAL FEATURES:




- 3 year parts warranty.
- Motor starter and control circuitry.
- Infinitely variable motor speed controller.

## OPTIONAL ACCESSORIES:

- Source capture plenum.
- Final stage, absolute HEPA postfilter.
- Pedestal mounting kit.
- Wall mounting kit.
- Optional remote variable speed controller.
- Machine mount stand.
- Ceiling mount kit.




MistBuster® ducted to a 7.5 hp vertical machining center.

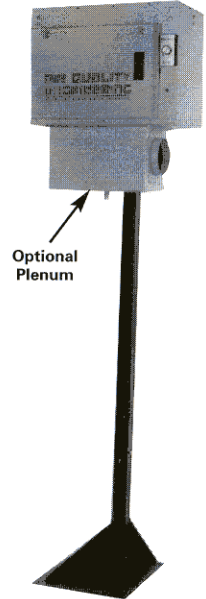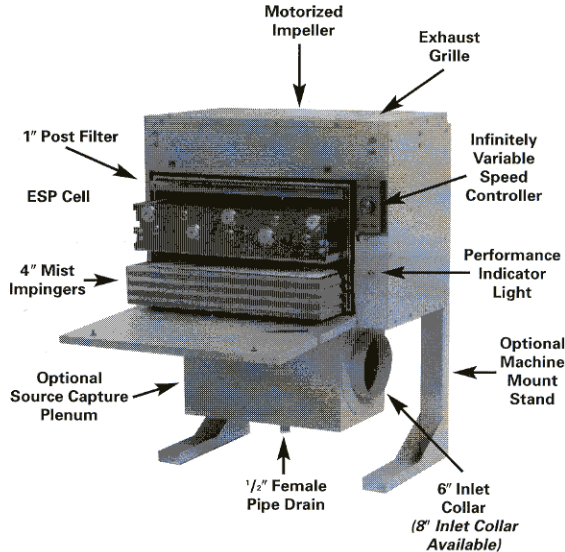

Optional pedestal stand adjustable from 7'7" - 10'8" from the top of the unit.

## SPECIFICATIONS:

- DIMENSIONS:** Cabinet 25" L x 13 1/2" W x 18 3/8" H
- INLET OPENING:** 16.62" x 9.08"
- WEIGHT:** 71 lbs. installed weight  
82 lbs. shipping weight Ships UPS!
- CABINET:** 16 gauge steel cabinet with a chemical resistant baked enamel, ivory texture finish
- AIRFLOW:** 50-500 cfm @ 0.6" wg top discharge
- EFFICIENCY:** Up to 97% efficiency per ASHRAE 52.1
- FILTRATION:** **1st Stage** 4" thick aluminum mist impingers.  
**2nd Stage** ESP Cell-Minimum voltage gradient is 20,000 volts per inch  
**3rd Stage** 1" thick aluminum mesh  
**4th Stage** Optional HEPA filter 99.97% efficient
- POWER SUPPLY:** Self-regulating, dual voltage solid-state power supply.
- MOTORIZED IMPELLER:** Backward curved, vibration-free, direct drive rated at 710 cfm @ 0" wg.
- POWER:** 115 Vac, 60 Hz, 2 amps  
230 Vac, 60 Hz, 1 amp
- POWER CORD:** Ten-foot power cord with standard molded plug.
- SOUND LEVELS:** 74 dBA @ 3'  
70 dBA @ 6'



**AIR QUALITY  
ENGINEERING**

7140 Northland Drive North, Brooklyn Park, MN 55428-1520 USA

FAX: (763) 531-9900 EMAIL: aqe@isd.net WEB SITE: www.air-quality-eng.com

TOLL FREE: 1-800-328-0787

Air Quality Engineering, Inc., has a policy of continuing product improvement, and reserves the right to make changes in design and specification without notice.



PN51712